
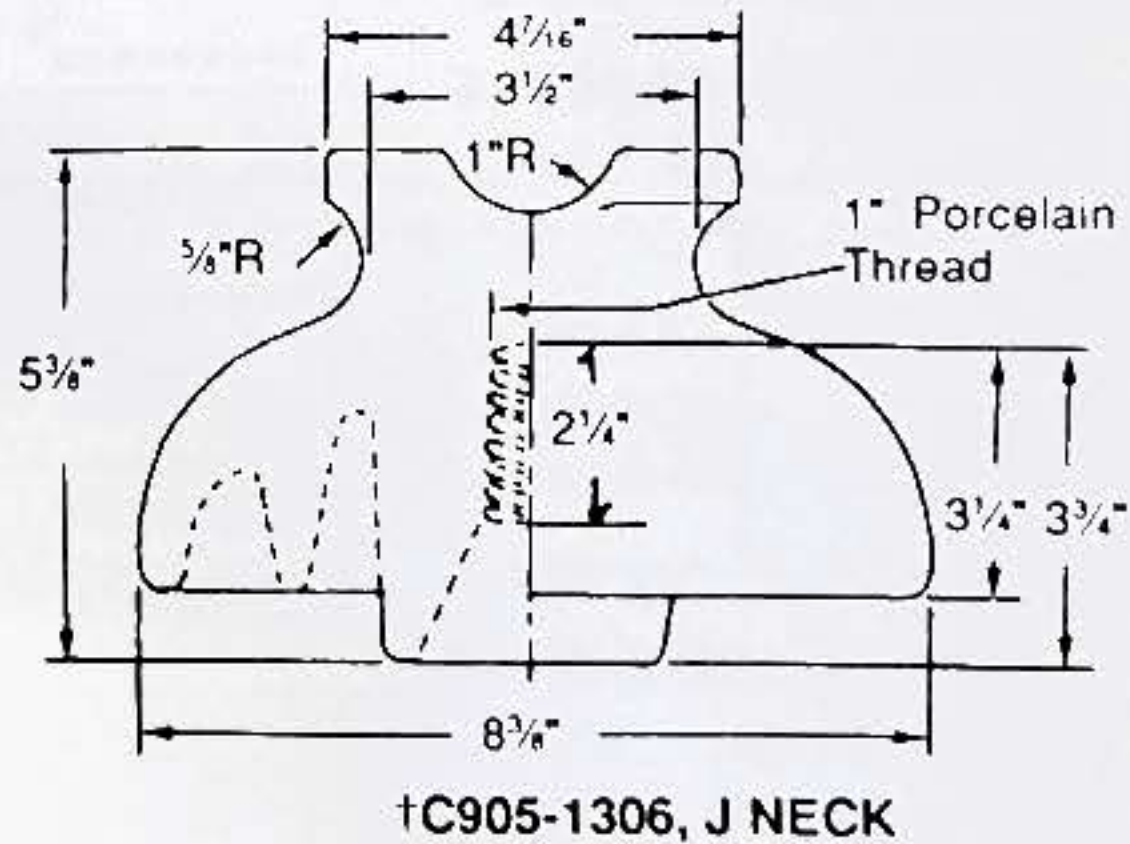
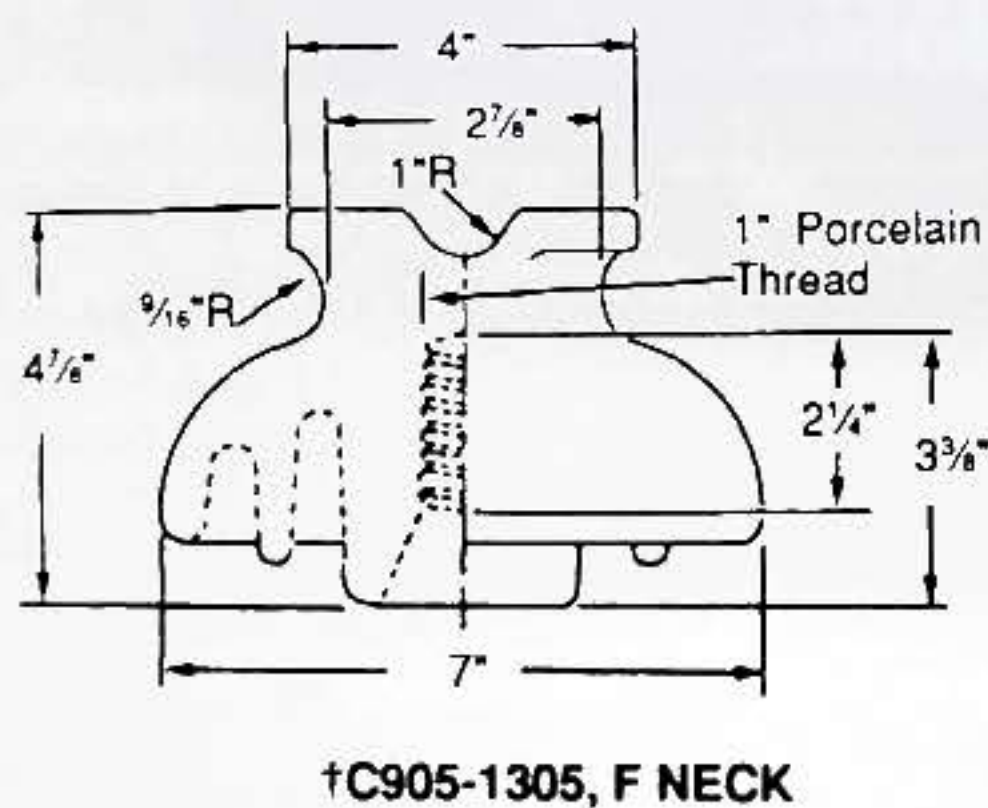
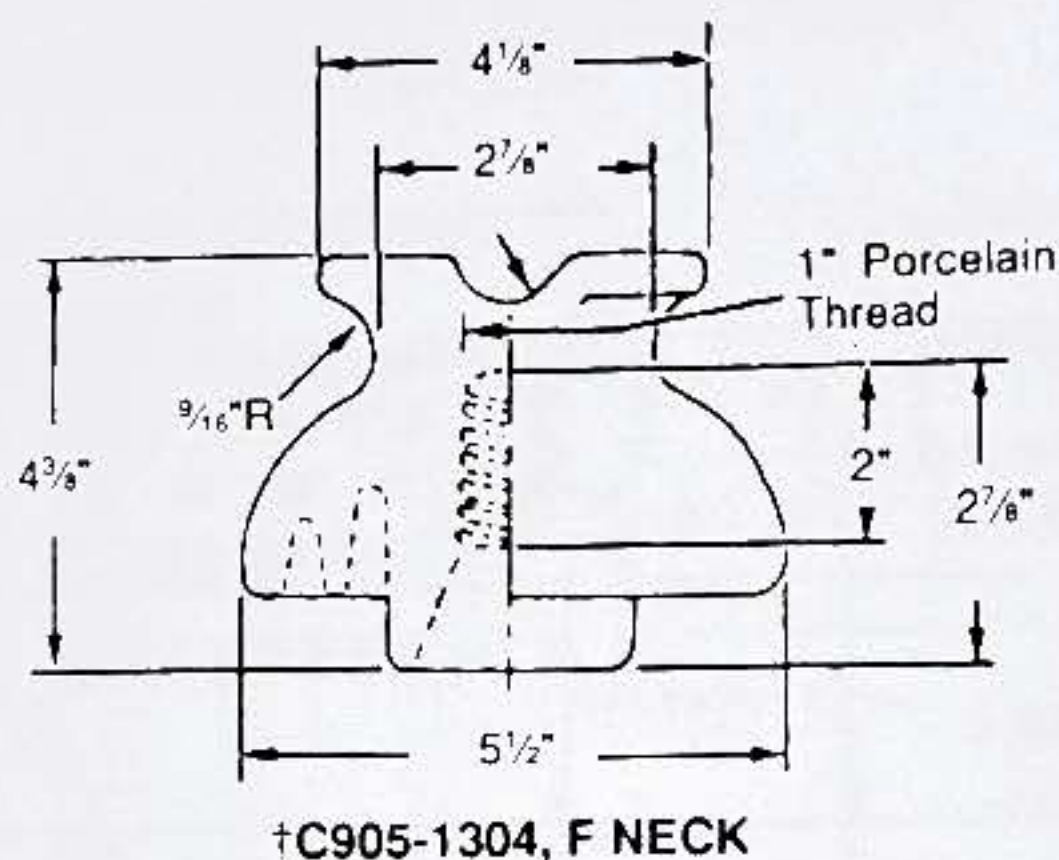
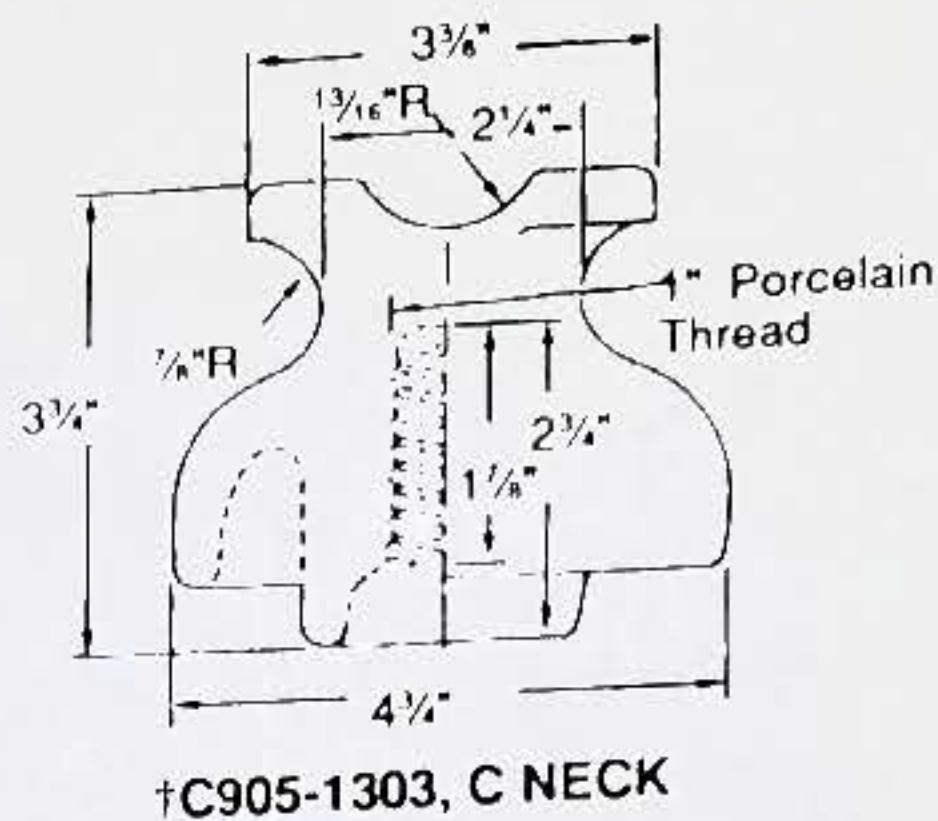


LOW-VOLTAGE PIN INSULATORS

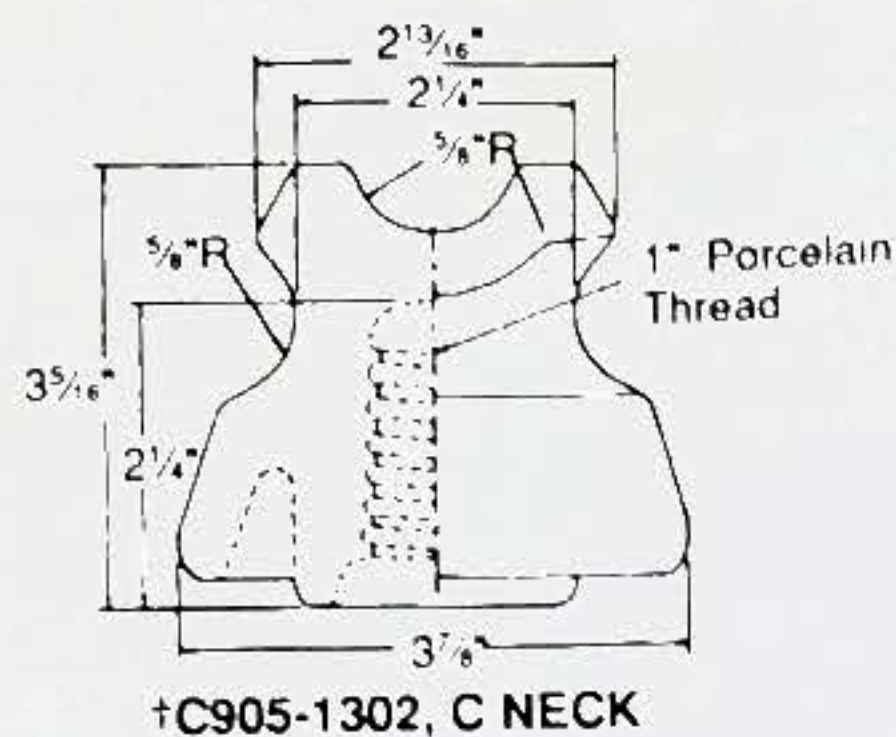

*Catalog Number	ANSI Class	Application Voltage	*Glaze Type	RIV/1,000 KHz		Flashover Ratings, kV				60-Hz Punc- ture, kV	Cant., lb.	Dimensions		Min. Pin Ht.	Wt. per 100, lb.
				Max., micro-V	Test, Ø-G	60-Hertz		Impulse				Leak- age	Dry Arc		
						Dry	Wet	Pos.	Neg.						
---	---	---	Plain	2,500	5kV	50	25	75	95	70	2,500	5"	3¾"	4"	130
†C905-1302	55-2	7.2kV	Radio	50											
---	---	---	Plain	5,500	10kV	65	35	100	130	90	2,500	7"	4½"	5"	260
†C905-1303	55-3	13.2kV	Radio	50											
---	---	---	Plain	5,500	10kV	70	40	110	140	95	3,000	9"	5"	5"	360
†C905-1304	55-4	13.2kV	Radio	50											
---	---	---	Plain	8,000	15kV	85	45	140	170	115	3,000	12"	6¼"	6"	580
C905-1305	55-5	14.4kV	Radio	100											
C905-1306	55-6	23kV	Radio	100	22kV	100	50	150	170	135	3,000	15"	8"	7½"	900

*All units are radio-free and Sky-Glaze® gray color. For all brown or plain Sky-Glaze, contact Chance Servi-Center.
†REA accepted.