


## KS3-10A



A=10XP+14.6  
B=10XP+24.2  
P:No. of Poles



| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-10A           | 600V                   | 10A                    |



| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M3.5             |

| P | 2    | 3    | 4    | 5    | 6    | 7    | 8     | 9     |
|---|------|------|------|------|------|------|-------|-------|
| A | 34.6 | 44.6 | 54.6 | 64.6 | 74.6 | 84.6 | 94.6  | 104.6 |
| B | 44.2 | 54.2 | 64.2 | 74.2 | 84.2 | 94.2 | 104.2 | 114.2 |

## KS3-20A



A=11.3XP+17  
B=11.3XP+28.2  
P:No. of Poles



| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-20A           | 600V                   | 10A                    |



| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M4               |

| P | 2    | 3    | 4    | 5    | 6    | 7     | 8     | 9     |
|---|------|------|------|------|------|-------|-------|-------|
| A | 39.6 | 50.9 | 62.2 | 73.5 | 84.8 | 96.1  | 107.4 | 118.7 |
| B | 50.8 | 62.1 | 73.4 | 84.7 | 96.0 | 107.3 | 118.6 | 129.9 |

## KS3-30A



A=12.6XP+19.1  
B=12.6XP+33.2  
P:No. of Poles




| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-30A           | 600V                   | 30A                    |

| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M4               |

| P | 2    | 3    | 4    | 5    | 6     | 7     | 8     | 9     |
|---|------|------|------|------|-------|-------|-------|-------|
| A | 44.3 | 56.9 | 69.5 | 82.1 | 94.7  | 107.3 | 119.9 | 132.5 |
| B | 58.4 | 71.0 | 83.6 | 96.2 | 108.8 | 121.4 | 134.0 | 146.6 |

## KS3-60A




A=18.1XP+40  
B=18.1XP+25  
P:No. of Poles

| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-60A           | 600V                   | 60A                    |


| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M6               |

| P | 2    | 3    | 4     | 5     | 6     | 7     | 8     | 9     |
|---|------|------|-------|-------|-------|-------|-------|-------|
| A | 76.2 | 94.3 | 112.4 | 130.5 | 148.6 | 166.7 | 184.8 | 202.9 |
| B | 61.2 | 79.3 | 97.4  | 115.5 | 133.6 | 151.7 | 169.8 | 187.9 |

## KS3-100A

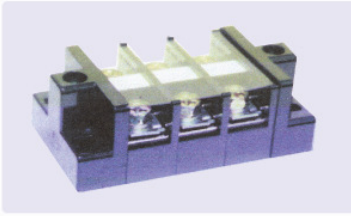

A=23.2XP+25  
B=18.1XP+40.4  
P:No. of Poles

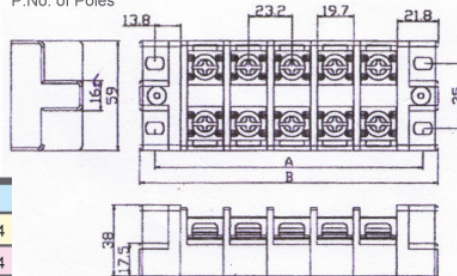


| P | 2    | 3     | 4     | 5     | 6     | 7     | 8     | 9     |
|---|------|-------|-------|-------|-------|-------|-------|-------|
| A | 74.0 | 97.2  | 120.4 | 143.6 | 166.8 | 190.0 | 213.2 | 236.4 |
| B | 90.9 | 113.2 | 136.4 | 159.6 | 182.2 | 206.0 | 229.2 | 252.4 |


| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-100A          | 600V                   | 100A                   |

| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M8               |

## KS3-150A

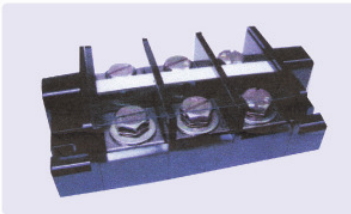

A=28.3XP+22  
B=28.3XP+46.2  
P:No. of Poles

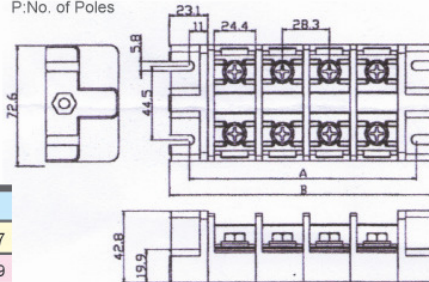


| P | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     |
|---|-------|-------|-------|-------|-------|-------|-------|-------|
| A | 78.6  | 106.9 | 135.2 | 163.5 | 191.8 | 220.1 | 248.4 | 276.7 |
| B | 102.8 | 131.1 | 159.4 | 187.7 | 216.0 | 244.3 | 272.6 | 300.9 |


| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-150A          | 600V                   | 150A                   |

| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M8               |

## KS3-200A

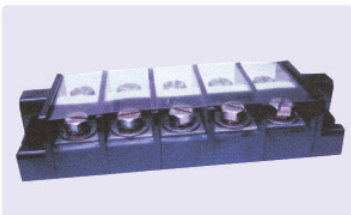

A=36XP+29.4  
B=36XP+51  
P:No. of Poles

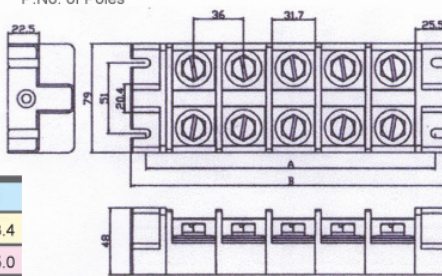


| P | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     |
|---|-------|-------|-------|-------|-------|-------|-------|-------|
| A | 101.4 | 137.4 | 173.4 | 209.4 | 245.4 | 281.4 | 317.4 | 353.4 |
| B | 123.0 | 159.0 | 195.0 | 231.4 | 267.0 | 303.0 | 339.0 | 375.0 |


| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-200A          | 600V                   | 200A                   |

| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M10              |

## KS3-300A

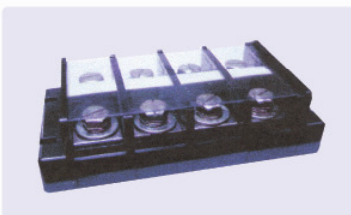

A=41.7XP+26.1  
B=41.7XP+50  
P:No. of Poles



| P | 2     | 3     | 4     | 5     | 6     | 7     |
|---|-------|-------|-------|-------|-------|-------|
| A | 110.4 | 152.1 | 193.8 | 235.5 | 277.2 | 318.9 |
| B | 133.6 | 175.3 | 217.0 | 258.7 | 300.4 | 342.1 |

| 產品型號<br>Model No. | 額定電壓<br>Voltage Rating | 額定電流<br>Current Rating |
|-------------------|------------------------|------------------------|
| KS3-300A          | 600V                   | 300A                   |

| 本體材質<br>Material Quality | 螺絲規格<br>Screw Specification |
|--------------------------|-----------------------------|
| 電木<br>Bakelite           | 鐵<br>Steel M12              |